

01 Product Highlight

6090 CNC 4 DSP

Features

- Wi DSP CONNECT
- SD
- SD Wi SD
- 2.2KG powerfu
- YouTube

DSP

- DSP
- TF
- G

6090 CNC 4

- USB
- 3
- PCB
- 4
- Z
- broaded
- CNC

02 Parameters


6090 CNC 4	
Dimensions	X860mm * Y630mm * Z480mm
Max.workpiece	X600mm * Y900mm * Z100mm


Model	6063 6061
Max. Travel	≤100mm
Travel	X 1605mm
	Y 2005mm
	Z 1605mm
Max. Dia.	X Dia. 30mm
	Y Dia. 30mm
	Z Dia. 16mm
Max. Torque	57N.m 3A 150N.cm
Max. Spindle Speed	2.2kW 24000RPM
Spindle	ER16-A 3 10mm
Accuracy	< = 0.05mm
Resolution	0.03mm
Control	G / TAB / NC / NCC
Max. Feed	4000mm/min
Max. Spindle Power	0.25kW
Max. Torque	G
Weight	kg
Power	AC110V / AC220V
6090 CNC	
Size	136 * 116 * 92 mm
Weight	34kg
Max. Feed	50mm/min
Ratio	1:3
Accuracy	0.1





USB Cable

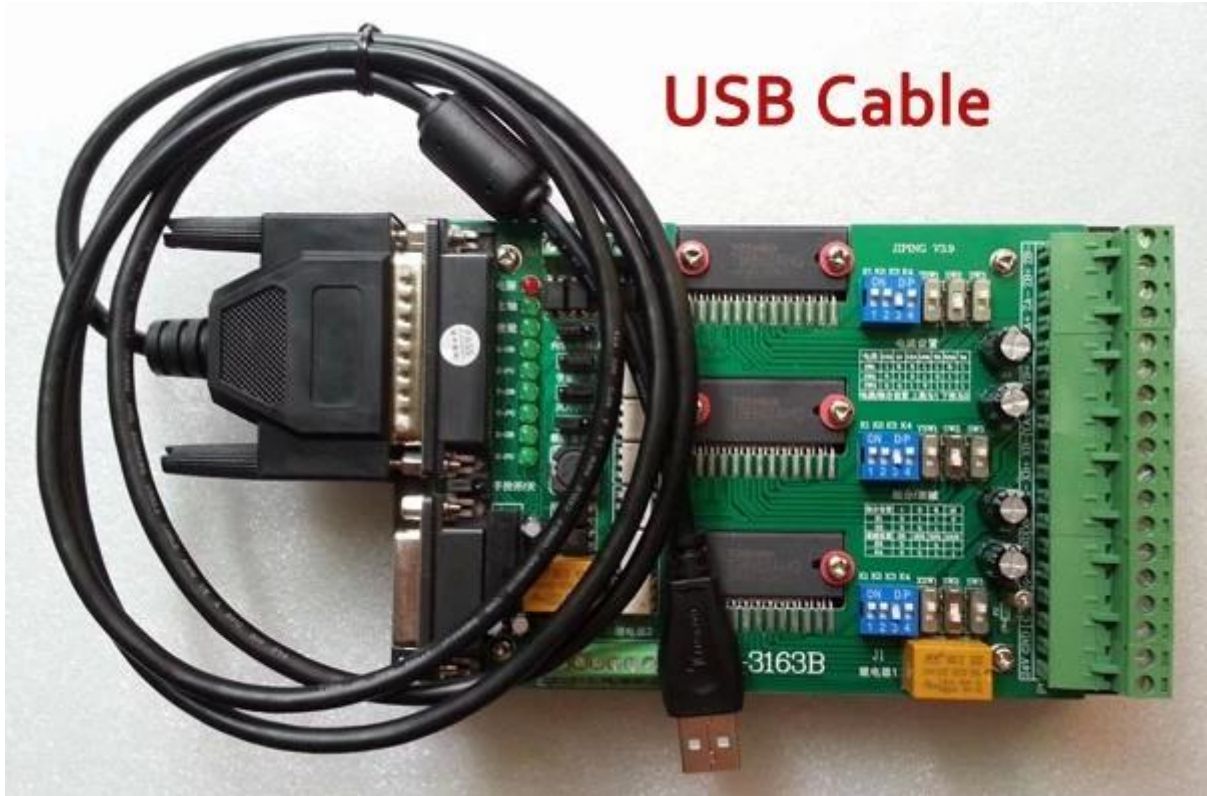

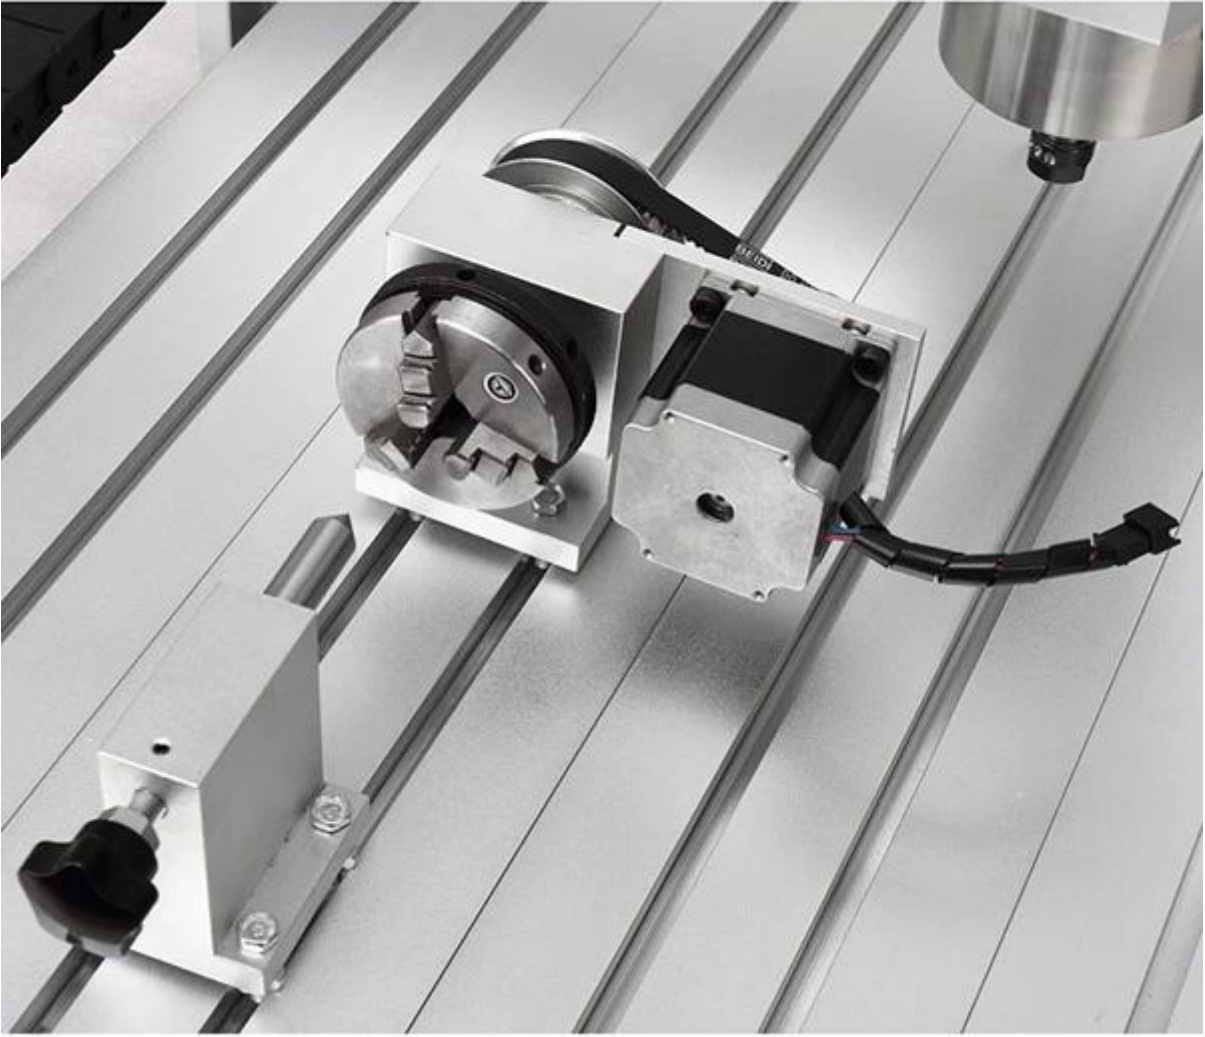


6090 CNC 4



04 Applications



6090 CNC 4 alumimun PVC PCB

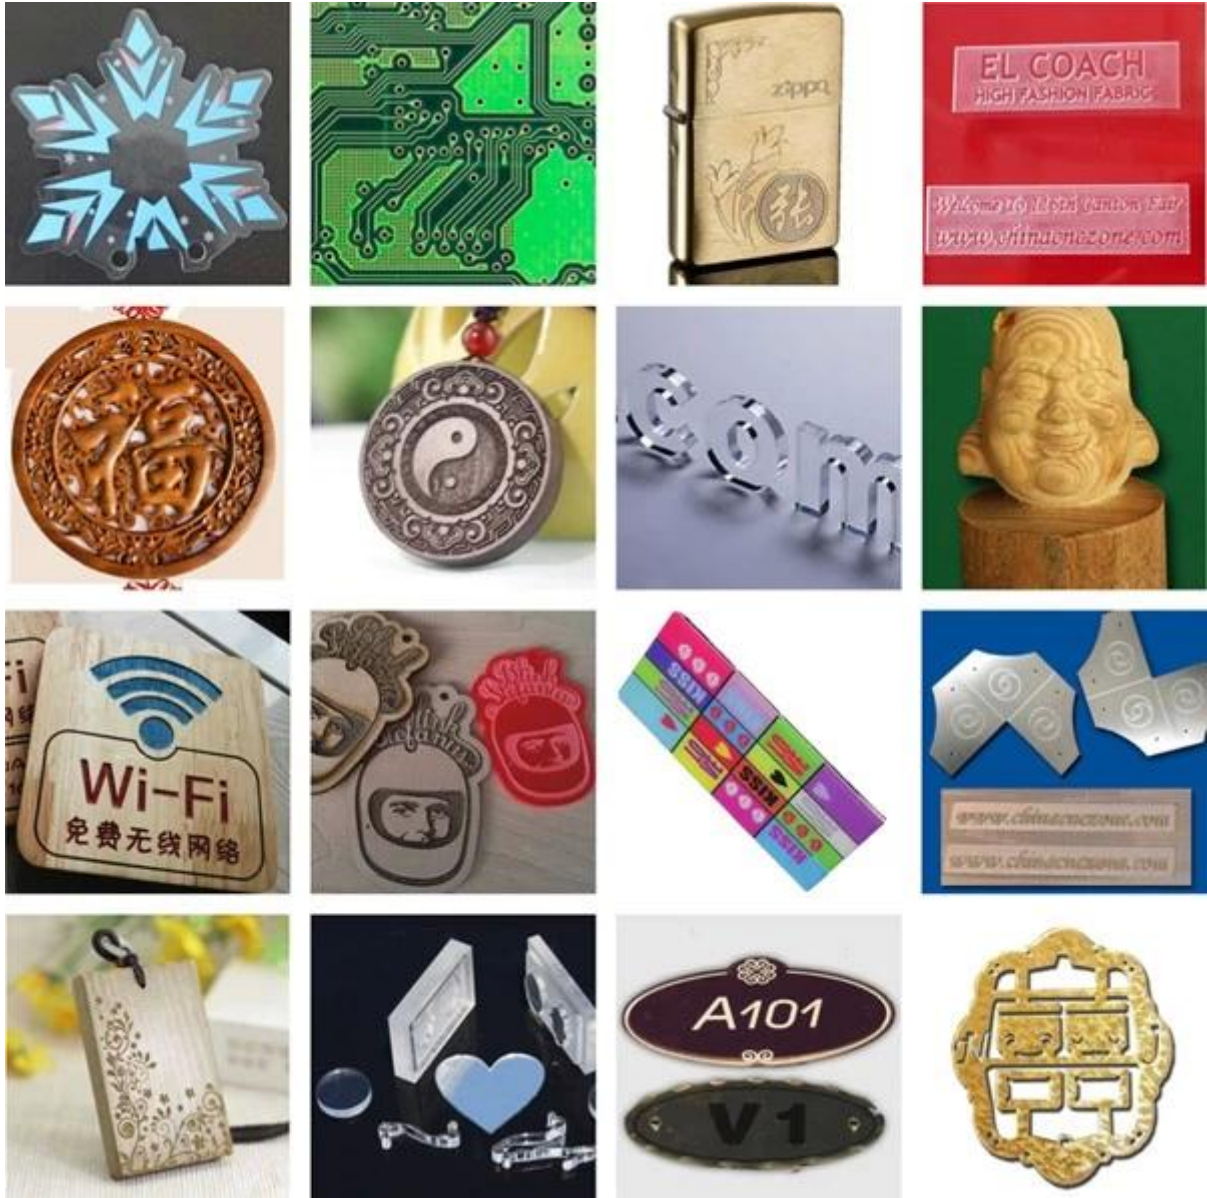

05 *Factory Tour* **ChinaCNCzone**

ChinaCNCzone 提供不同种类的 CNC 零件



QA Inspection Area



Mechanical Assembly Area



Machine Commissioning Area



Finish Products Area



Packaging Area



Always be imitated, never be surmounted.

We all use well-designed professional aluminum to manufacture the machine. Almost all of the structural member are extruded by a dedicated mold. The production of large quantities so that we have a strong price competitiveness. Professional mold and materials so that our quality has been stable protection.





SHENZHEN SCOTLE TECHNOLOGY GROUP LIMITED

ChinaCNCzone, engrave your colorful life!

客户合影及公司文化 Customers and Company Culture

