


最大厚度	0-250mm 最大厚度
精度	& LT 0.01 mm
最大尺寸	最大 : 2 * 2mm, 最小 : 1 * 1mm
工作温度	5 °C -45 °C
湿度	5 % -95 %
分辨率	≤1000dpi
接口	USB 2.0 (前置)
操作系统	Windows XP / Windows 7 / Windows 8
兼容性	兼容 Windows 操作系统
支持的格式	支持的格式 & 格式; WinsealXP 支持的格式 (BMP, JPEG, PLT, CDR, AI,) TIFF, PCX, DIB, TIF
支持的格式	支持的格式, WinsealXP
重量	重量
尺寸	重量
底座	底座 bottom 底座 底座 底座
尺寸	140 * 75 * 58cm
尺寸	尺寸 尺寸 尺寸
尺寸	157 * 94 * 78cm
重量	230kg (重量 重量 重量)





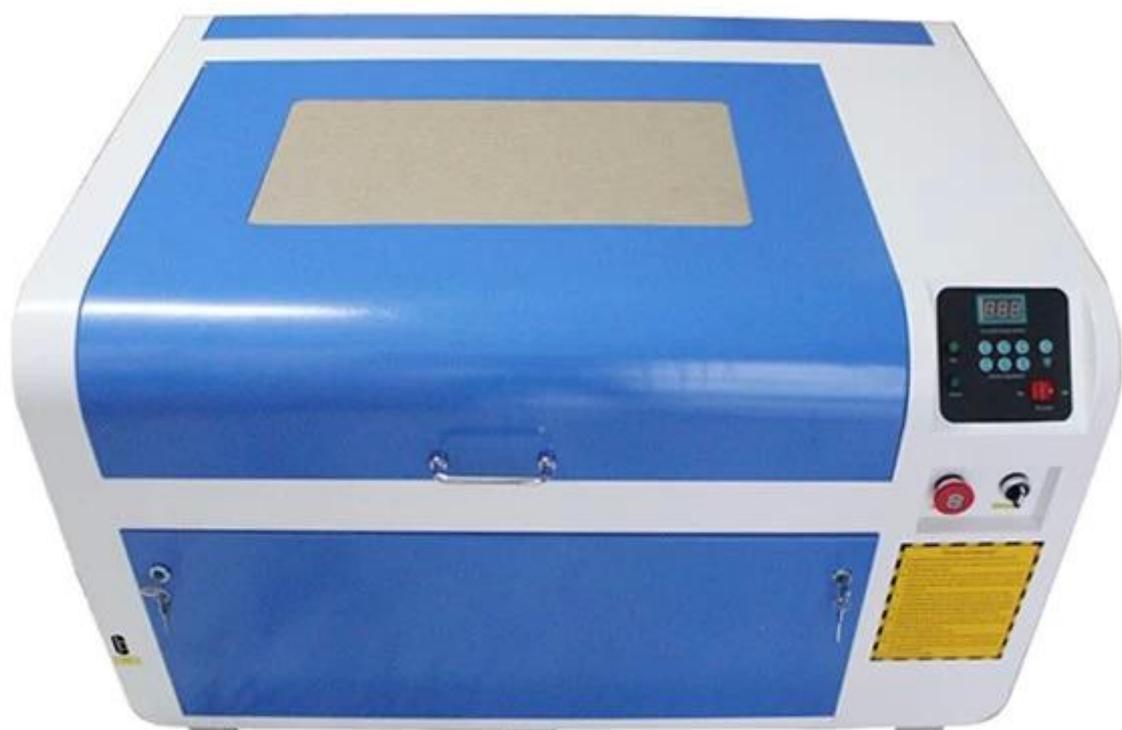

USB interface



Control Panel




stop switch
laser switch



Power Interface




- Hydraulic Support rod, beautiful and protect the object from move due to accidently touch and close.

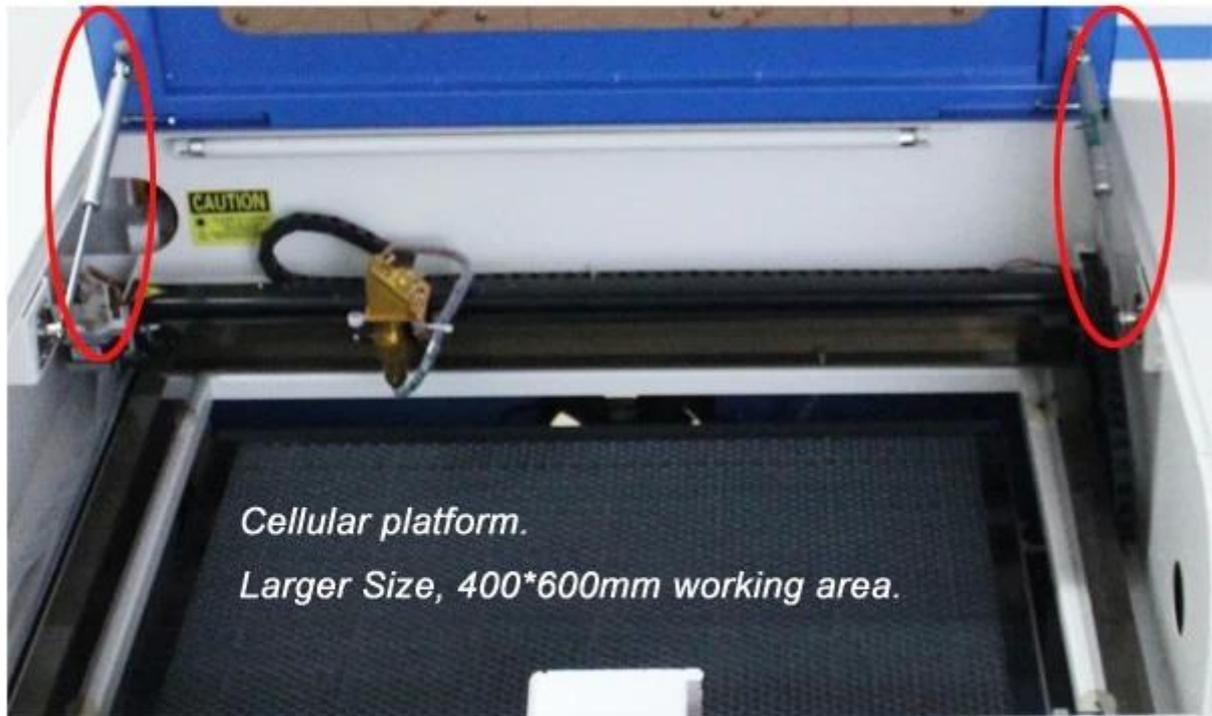

- Water Cooling and Protection System, protect the laser tube from bursting if no water.
- Embedded Exhaust Fan, Easier intall, Safer transport.



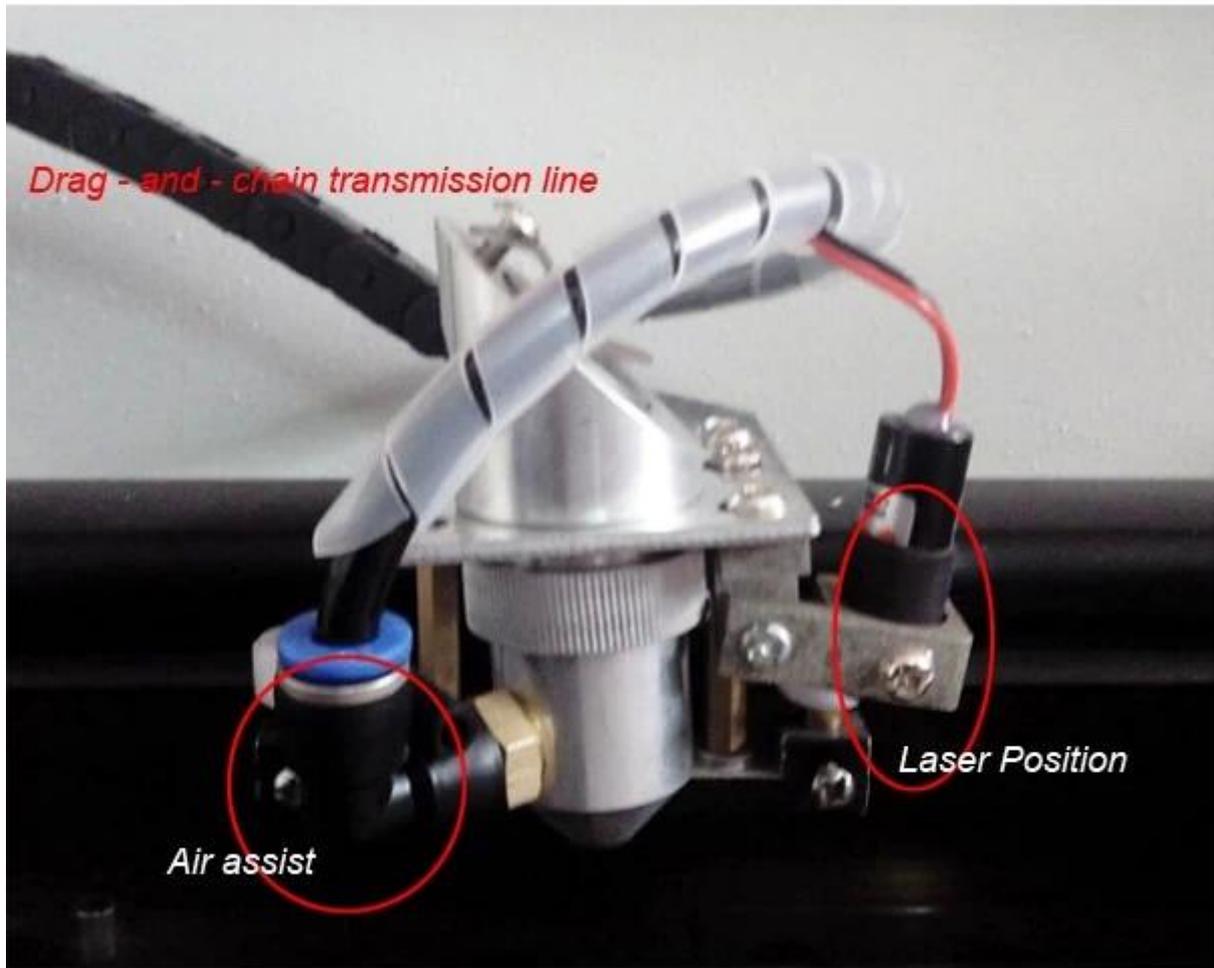

04 Applications China zone

- **XB-4060 50W / 60W** □□□□ □□□□□ □□ □□□ □□ □□ □□ □□□ □□□
- Advertising & A, □□□ □□
- □□□ □□□
- Woodwork □
- Model □
- Leather □□□□
- □□ -NOT □□ (□□)

Material	Engrave	Cut
Wood	Yes	Yes
Jade	Yes	
Acrylic	Yes	Yes
Glass	Yes	
Ceramic	Yes	
Delrin	Yes	Yes
Cloth	Yes	Yes
Leather	Yes	Yes
Marble	Yes	
Matte Board	Yes	Yes
Melamine	Yes	Yes
Paper	Yes	Yes
Mylar	Yes	Yes
Press Board	Yes	Yes
Rubber	Yes	Yes
Wood Veneer	Yes	Yes
Fiberglass	Yes	Yes
Painted Metals	Yes	
Tile	Yes	
Plastic	Yes	Yes
Cork	Yes	Yes
Corian	Yes	Yes
Anodized Aluminum	Yes	
Ceramics	Yes	
Stainless Steel	*	
Brass	*	



*****means you have to use a spray called "thermark" to spray the surface of the material and then you can mark on it.**



05 Factory Tour



06 **Certifications**

China  zone



